

# Rollmaxx by



# SureWeld

Specialised Transport Solutions

# SPECIFICATIONS

---



N.B: Specifications are subject to change without notice, as part of continuous product improvement

## 2-Tonne Range

- Mechanical Override Brakes
- Front Axle Disc Brakes
- 50mm Coupling
- 14"/13" Steel Wheels. "Sunraysia" White
- Ford Stud Pattern

MODEL	A	B	C	D	E	F	G	H	I	TARE	A.T.M	PAYLOAD
SW2000C^	1900	1140	4700	470	280	1100	1130	1600	300	300kg	2200kg	1900kg
SW2000	1900	1140	4700	470	280	1310	1350	1820	405	340kg	2200kg	1860kg
SW2000W	1900	1140	4700	470	375	1600	1640	2110	550	360kg	2200kg	1840kg

## 2.4-Tonne Range


- 10" Electric Drum Brakes – All Wheels
- Electronic Break-away unit
- 50mm Coupling
- 14" Steel Wheels. "Sunraysia" white"
- Ford Stud Pattern

MODEL	A	B	C	D	E	F	G	H	I	TARE	A.T.M	PAYLOAD
SW2400EC	1900	1140	4700	470	280	1100	1130	1600	300	360kg	2400kg	2040kg
SW2400E	1900	1140	4700	470	300	1310	1350	1820	405	380kg	2400kg	2020kg
SW2400EW	1900	1140	4700	470	375	1600	1640	2110	550	400kg	2400kg	2000kg

## 3.5 - 4.1 Tonne Range

- 12" Electric Drum Brakes – All wheels
- Electronic Break-away unit
- 50mm/70mm\* Coupling
- 16" Steel Wheels – "Sunraysia" White.
- Landcruiser 6 Stud Pattern

MODEL	A	B	C	D	E	F	G	H	I	TARE	A.T.M	PAYLOAD
SW3500E	2600	900	4800	580	400	1800	1870	2400	650	620kg	3500kg	2880kg
SW4100E	2600	900	4800	580	400	1800	1870	2400	650	620kg	4100kg	3480kg

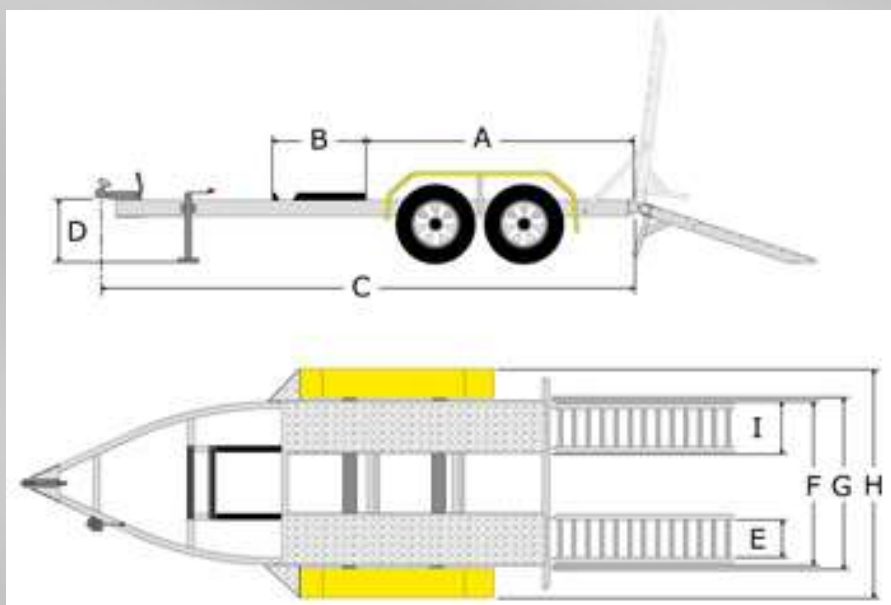

**Note:** All Dimensions in mm unless otherwise specified.

- A** = Deck Length
- B** = Bucket Rest Length
- C** = Trailer Length
- D** = Tow Hitch Height
- E** = Ramp Width [internal]
- F** = Deck Width
- G** = Clearance between Guards
- H** = Trailer Width [external]
- I** = Deck Section Width